


YXC-T500/T1000 RENTAL

Rental Transparent LED Display

INDOOR & OUTDOOR / RENTAL SERIES

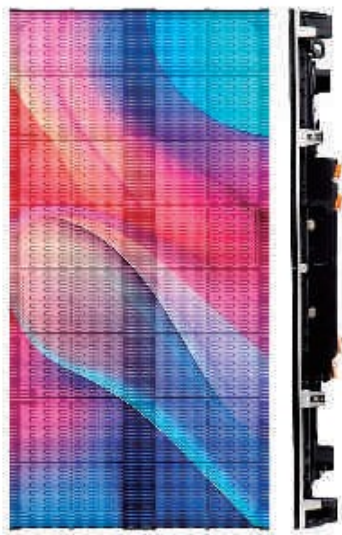

Product view: front and side

Built for repeated setup

A lightweight transparent LED display combining high transparency, high brightness, fast installation and protective performance for frequent assembly and disassembly.

Lightweight construction

Aluminum panel; specified weight of 3.5 kg.


High transparency and brightness

60-80% transparency; 4000-4500 nits.

Protection for rental use

Front IP65 / Rear IP54.

Panel dimensions

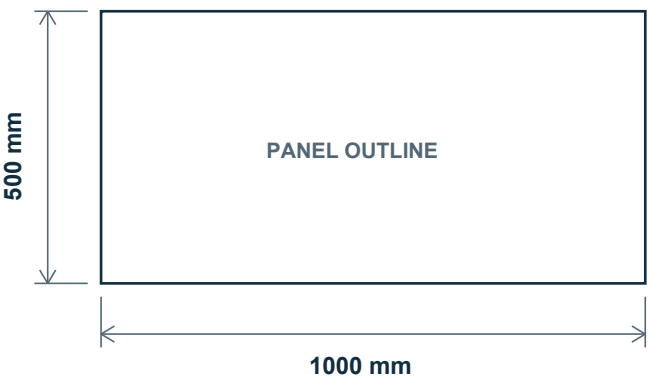

1000 × 500 mm

Nominal panel size. Outline schematic only; no structural detail or panel depth is implied.

Applications

Stage performances • Exhibitions • Commercial events
Brand launches • Window displays • Outdoor events

CUSTOMER GROUPS

LED rental companies • Stage engineering contractors • Event companies
Exhibition display companies • Advertising and media companies • LED distributors

YXC-T500/T1000 RENTAL

Rental Transparent LED Display

Specification	P2.6-5.2	P3.9-7.8	P7.8-7.8
Density (dots/m²)	73,964	32,875	16,436
LED Type	SMD1921	SMD1921	SMD3535
Panel Resolution (dots)	384 × 96	256 × 64	128 × 32
Transparency	60%	75%	80%
Drive Method	1/32 Scan	1/28 Scan	1/16 Scan
Best Viewing Distance	2.5-50 m	4-80 m	8-80 m
Brightness (nits)	4000	4000	4500
Panel Size	1000 × 500 mm		
Panel Material	Aluminum		
Weight	3.5 kg		
Refresh Rate	3840 Hz		
Input Voltage	AC110V/127V ±10%		
Max Power	400 W		
Average Power	200 W		
Ingress Protection	Front IP65 / Rear IP54		
Operating Environment	Indoor & Outdoor		
Life Span	100,000 Hours		

SHARED SPECIFICATIONS

Single-value rows apply to all three listed specifications.